



an RSO's dream come true

instadose+ dosimeters



**MIRION**  
TECHNOLOGIES

Dosimetry Services  
Division

## OVERVIEW

The instadose+ dosimeter helps Radiation Safety Officers (RSO) save time managing dosimetry programs by:

- **Eliminating the badge collection process**
- **Increasing compliance**
- **Tracking and controlling dose for high risk employees**
- **Reading intervals set for dose trending**
- **Alerting e-mails sent when a dose exceeds a user specified level**




## TECHNOLOGY BEHIND THE BADGE


instadose+ dosimeters use Bluetooth Low Energy (BLE) Technology to transmit dose data. The following communication devices are used to capture reads from instadose+ badges that are within range:

- Smart devices with BLE technology with the instadose app installed
- PCs with an instaLink-USB connected
- instaLink Hotspot Stations

A configurable calendar is used to set automatic read dates. At the scheduled date, the badge will attempt to transmit data to Mirion's secure servers. If communication does not occur, the badge will attempt to communicate every hour for 24 hours without intervention.

If the dosimeter is unable to communicate, the data will be stored until the next successful connection is established. Additionally, manual reads can be performed at anytime by pressing the button on the back of the badge.

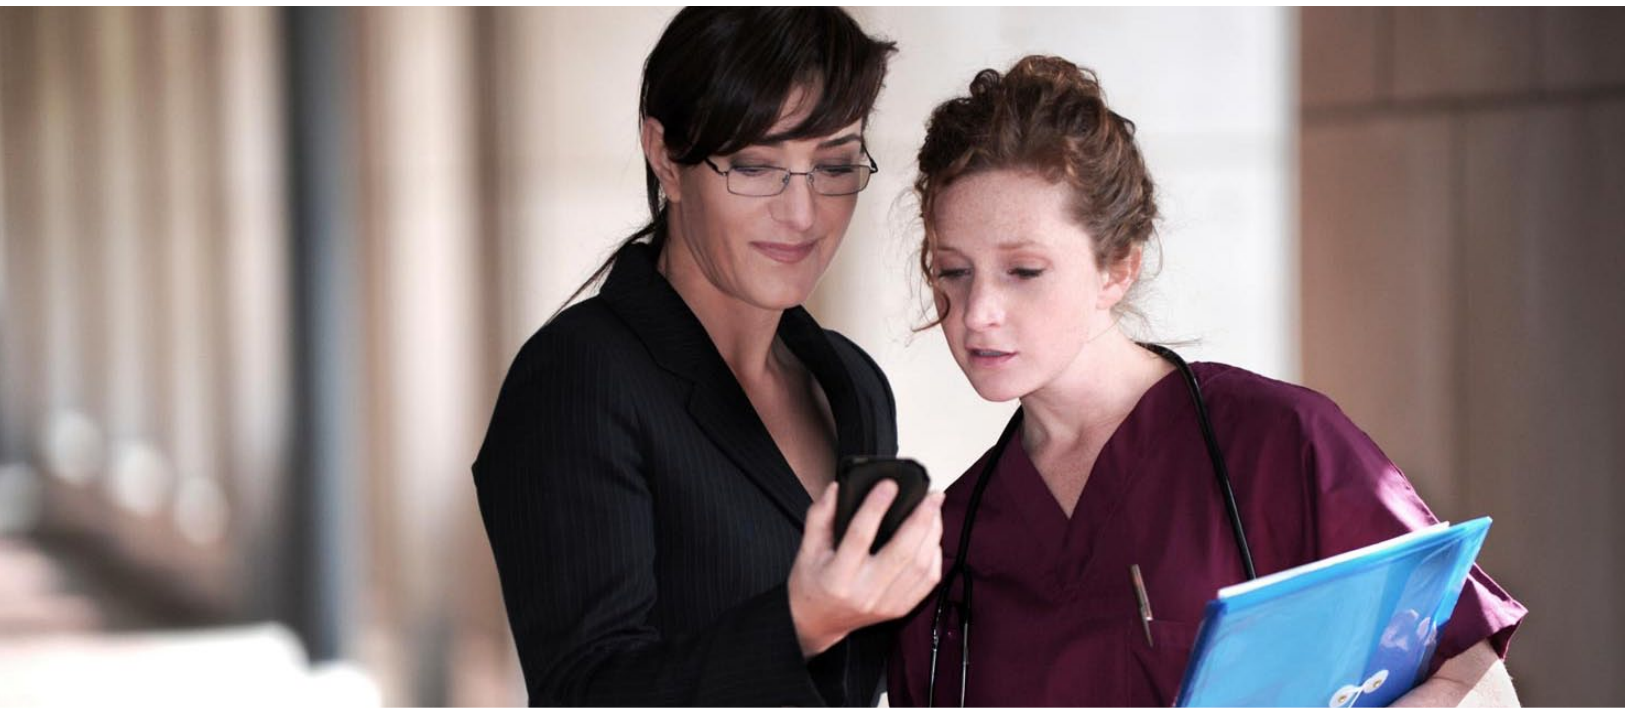

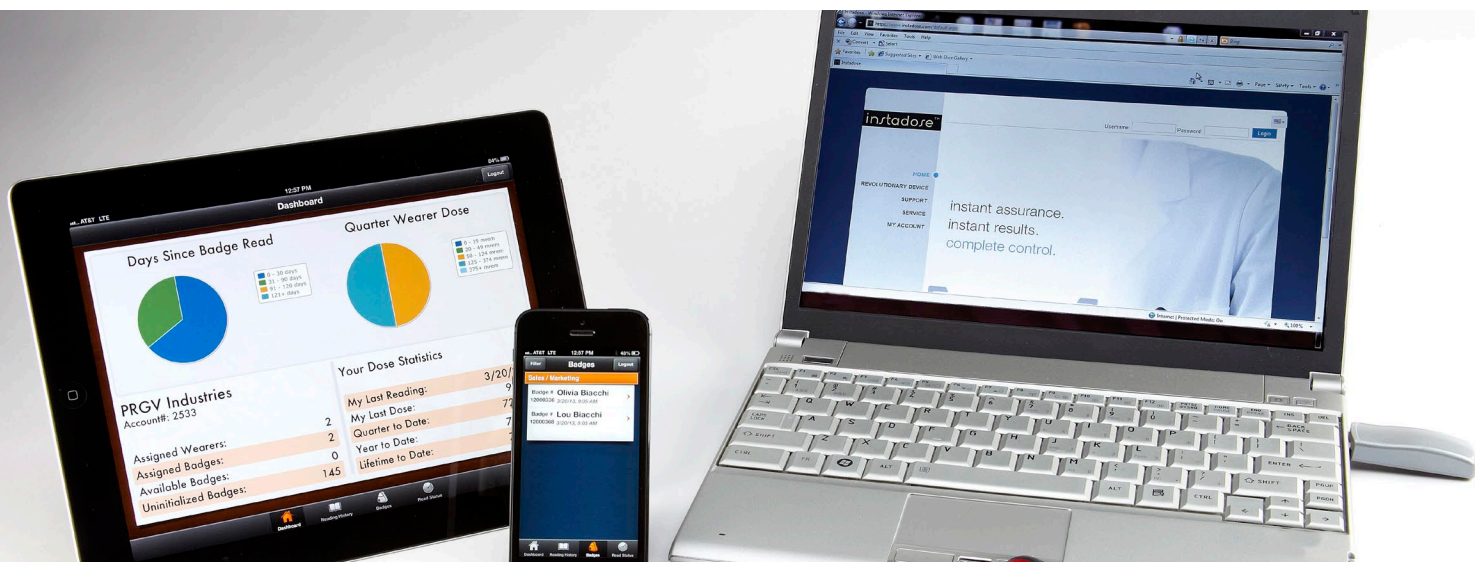

## SECURE WEB-BASED MANAGEMENT

Our web-based Account Management Program (AMP+) is a streamlined secure web-based account management system. From managing individual wearers, devices, and locations, we provide real-time access to account details, dosimeter assignments, reports, and pertinent account information.

## INSTADOSE APP FOR YOUR SMART DEVICES

The instadose app for smart devices is an application software that securely communicates dose data to Mirion's servers. The app allows you to view dose history, dosimeter assignment details, dose reads and status.

## DOSE COMMUNICATION PRODUCTS

### instaLink™ USB

Capture and transmit dose data to Mirion's secure servers from your computer with an instaLink USB. For the instaLink USB to work it must be connected and the "id2monitor" driver must be installed. The minimum BLE communication range is 25' with greater range possible depending on the physical environment and straight line of sight.

### instaLink™ HotSpot Stations

instaLink Hotspot Stations securely capture and transmit dose data to Mirion's servers. The BLE communication range is 25' or greater depending on the physical environment and straight line of sight. The instaLink Hotspot station can be connected to your network by Ethernet or WiFi.

The HotSpot measures 8" x 4".



Technical Specifications	instadose+ Dosimeter
<b>Description</b>	Direct Ion Storage device with BLE Technology
<b>Badge Type</b>	37= instadose+
<b>Accreditations/Approvals/Licenses</b>	In the United States under NVLAP (lab code: 100555-0)
<b>Minimum Reportable Dose</b>	3 mrem (0.03 mSv)
<b>Useful Dose Range</b>	1 mrem - 500 rem* (0.01 mSv - 5 Sv)
<b>Energy Response</b>	Photon 5 keV - 6 MeV

iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Mirion Technologies is under license. Other trademarks and trade names are those of their respective owners.

© Copyright 2013, All rights reserved. For trademark and registered trademark information. Specifications are subject to occasional change, please ask for confirmation of the information given in this publication.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



2652 McGaw Avenue | Irvine, CA 92614  
 USA  
 U.S./Canada: +1.800.251.3331  
 U.K.: 0170.629.9329  
 Worldwide: +1.949.419.1000  
 dsd-support@mirion.com

Copyright (c) 2014 Mirion Technologies, Inc. or its affiliates. All rights reserved. Mirion, the Mirion logo, and other trade names of Mirion products listed herein are registered trademarks or trademarks of Mirion Technologies, Inc. or its affiliates in the United States and other countries. Third party trademarks mentioned are the property of their respective owners.